



# SILVERstandard

**The new standard for adjustables.**

## DESCRIPTION

The SILVERstandard Adjustable Base unifies innovation, functionality and design in one single system. The motion-giving core technology is entirely integrated into the side rails and was created to be extraordinarily easy assembled through a modularity-based model. Disassembly is just as simple, making it a convenient piece of furniture to transport when moving rooms or houses. The Frame Control allows for state-of-the-art up and down movement of the head and foot sections, including the most efficient wall keeping mechanism on the market.



## FEATURES


- Easy to ship with UPS or FedEx
- Easy to assemble and disassemble by one person
- Head Up, Foot Up and Nightstand Reach functionality
- Hidden technology
- Customizable component design
- Underbed light
- Wireless Sync for Split King
- Two USB ports
- Zero clearance design
- Free fall-design

### Headquarters

LOGICDATA Electronic & Software Entwicklungs GmbH  
Wirtschaftspark 18, 8530 Deutschlandsberg, [office.at@logicdata.net](mailto:office.at@logicdata.net)

### North America

LOGICDATA North America Inc., 1525 Gezon Parkway SW,  
Suite C Grand Rapids, MI 49509, USA, [office.na@logicdata.net](mailto:office.na@logicdata.net)

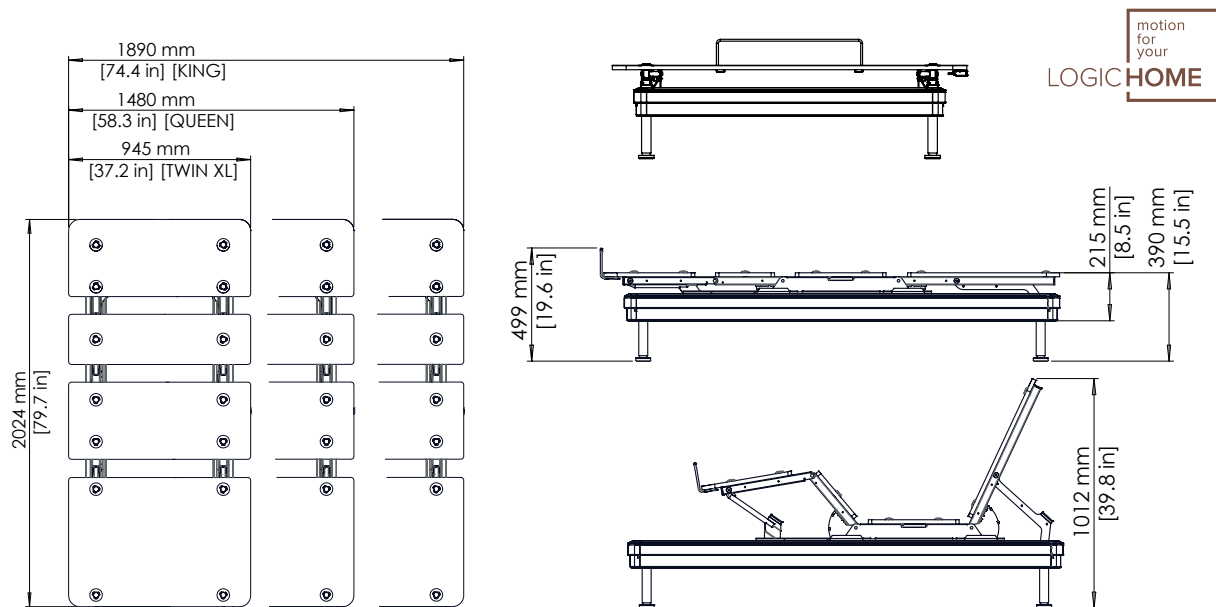

## TECHNICAL DATA

<b>Input voltage</b>	100-240 VAC		
<b>Rated input current</b>	2.2 A		
<b>Standby power</b>	1.8 W		
<b>Lifetime durability</b>	7,500 cycles		
<b>Ambient conditions (operation)</b>	+5°C to +40°C at 10% to 95 % relative humidity (non-condensing), with +27°C max dew point		
<b>Ambient conditions (transport/ storage)</b>	-35°C to +85°C at 10% to 95 % relative humidity (non-condensing), with +38°C max dew point. +55°C to +85°C for periods not exceeding 72h		
<b>Max Load</b>	700 lbs (315 kg)		
<b>Wireless working frequency</b>	2.4 GHz		
<b>IP Protection Degree (IEC 60529)</b>	IP20		
<b>Applicable standards</b>	RoHS 2011/65/EU   UL 962   FCC CFR 47 Part 15 Subpart B/C   California proposition 65   Dodd-Frank Wall Street Reform and Consumer Protection Act		
<b>Immunity to ESD interference (EN 61000-6-2)</b>	Conducted discharge: level 4   8kV Air discharge: level 4   15kV		
<b>Bed size</b>	<b>Queen</b>	<b>King</b>	<b>Twin XL</b>
<b>Dimensions (l x w x h)</b>	79.7" x 58.3" x 15.5" 2024 x 1480 x 390 mm	79.7" x 74.4" x 15.5" 2024 x 1890 x 390 mm	79.7" x 37.2" x 15.5" 2024 x 945 x 390 mm
<b>Frame height (without legs)</b>	8.5" (215 mm)	8.5" (215 mm)	8.5" (215 mm)
<b>Weight</b>	174 lbs (78.9 kg)	208.8 lbs (94.7 kg)	148.9 lbs (67.1 kg)
<b>Platform Package size</b>	60.2" x 28.3" x 6.3" 1530 x 720 x 160 mm	76.4" x 28.3" x 6.7" 1940 x 720 x 170 mm	39.4" x 28.3" x 6.3" 1000 x 720 x 160 mm
<b>Platform Package weight</b>	99 lbs (44.9 kg)	133.8 lbs (60.7 kg)	73.4 lbs (33.3 kg)
<b>Side Rail Package size</b>	79.5" x 13.8" x 9.6" 2020 x 350 x 245 mm	79.5" x 13.8" x 9.6" 2020 x 350 x 245 mm	79.5" x 13.8" x 9.6" 2020 x 350 x 245 mm
<b>Side Rail Package weight</b>	93 lbs (42.2 kg)	93 lbs (42.2 kg)	93 lbs (42.2 kg)
<b>Order code</b>	SFS-HFW-QEN-LDS-UBL	SFS-HFW-KNG-LDS-UBL	SFS-HFW-TXL-LDS-UBL